

CURRENT 20 Ampere
VOLTAGE RANG 50 to 1000 Volts

RS2001M THRU RS2007M


FEATURES



- * Low leakage
 - * Low forward voltage
 - * Mounting position: Any
 - * Surge overload rating: 300 amperes peak
 - * Ideal for printed circuit boards
 - * High forward surge current capability
- This series is SGS listed under the Recognized Component Index, file number SZXEC1902259902

MECHANICAL DATA

* Epoxy: Device has UL flammability classification 94V-0

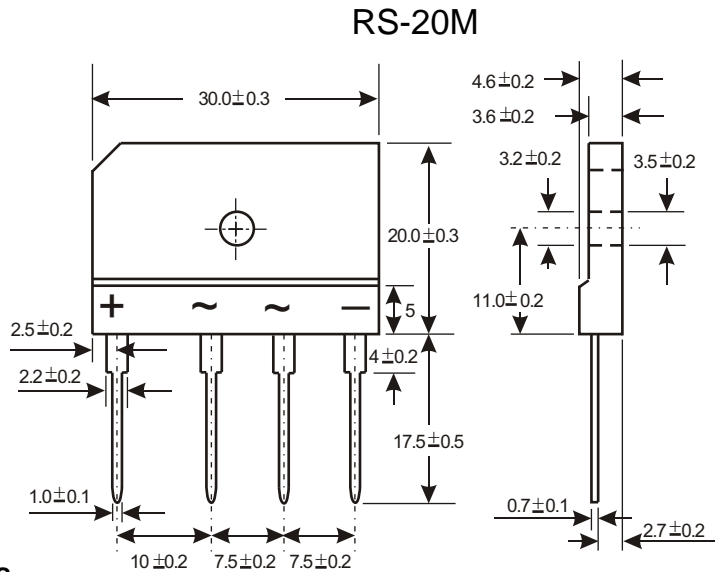

Dimensions in millimeters(1mm = 0.0394")

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	RS2001M	RS2002M	RS2003M	RS2004M	RS2005M	RS2006M	RS2007M	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current at Tc = 100°C with heatsink	IO	20							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load	IFSM	300							Amps
Operating and Storage Temperature Range	TJ,TSTG	-55 to + 150							°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	RS2001M	RS2002M	RS2003M	RS2004M	RS2005M	RS2006M	RS2007M	UNITS
Maximum Forward Voltage Drop per element at 10A DC	VF	1.1							Volts
Maximum Reverse Current at Rated	IR	10							uAmps
DC Blocking Voltage per element		0.2							mAmps

CURRENT 20 Ampere
 VOLTAGE RANG 50 to 1000 Volts

RS2001M THRU RS2007M

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

