

CURRENT 1.0 Ampere  
 VOLTAGE RANG 50 to 600 Volts


## E1A THRU E1J

### FEATURES

- ◆ Glass passivated device
- ◆ Ideal for surface mouted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:  
 250°C/10 seconds,0.375" (9.5mm) lead length,  
 5 lbs. (2.3kg) tension

### MECHANICAL DATA

Case: JEDEC SOD-123FL molded plastic body over passivated chip  
 Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026  
 Polarity: Color band denotes cathode end  
 Mounting Position: Any  
 Weight:0.0007 ounce, 0.02 grams

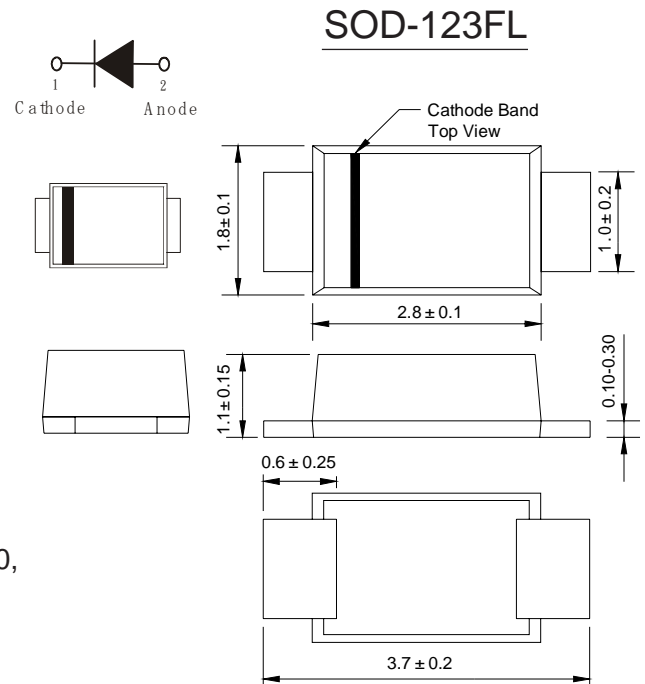

Dimensions in millimeters

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	DSF1A E1A	DSF1B E1B	DSF1C E1C	DSF1D E1D	DSF1E E1E	DSF1G E1G	DSF1J E1J	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	VOLTS	
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	VOLTS	
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	VOLTS	
Maximum average forward rectified current	$I_{(AV)}$	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	25.0							Amps	
Maximum instantaneous forward voltage at 1.0A	$V_F$	0.95			1.25		1.7		Volts	
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	$I_R$	5.0				100.0				$\mu A$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	35								ns
Typical junction capacitance (NOTE 2)	$C_J$	10								pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	85								K/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ C$	

Note: 1. Measured with  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{rr}=0.25A$ .  
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 3. PCB mounted on 0.2\*0.2" (5.0\*5.0mm) copper pad area.

CURRENT 1.0 Ampere  
 VOLTAGE RANG 50 to 600 Volts

**E1A THRU E1J**

RATING AND CHARACTERISTIC CURVES E1A Thru E1J

FIG. 1- FORWARD CURRENT DERATING CURVE

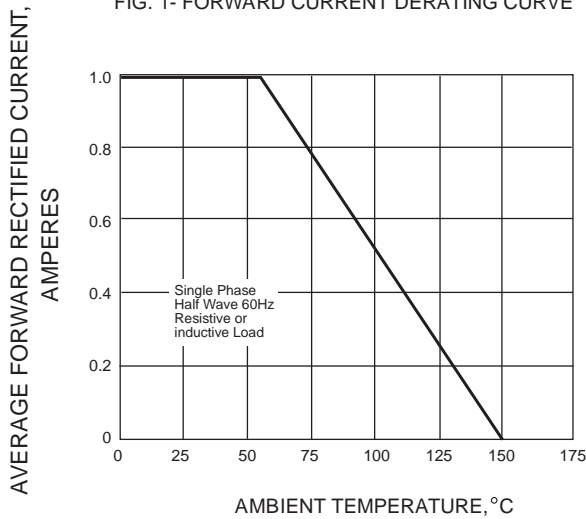


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

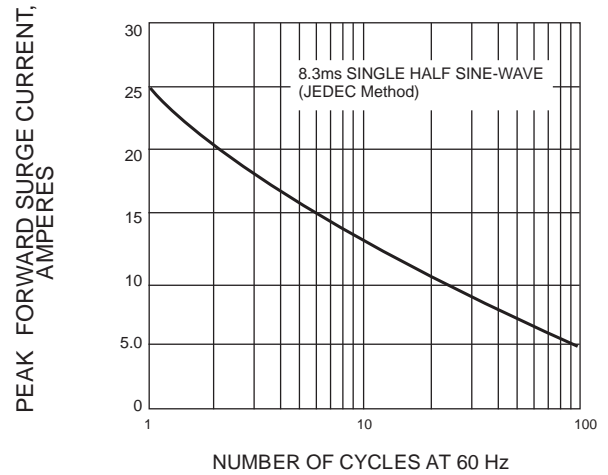


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

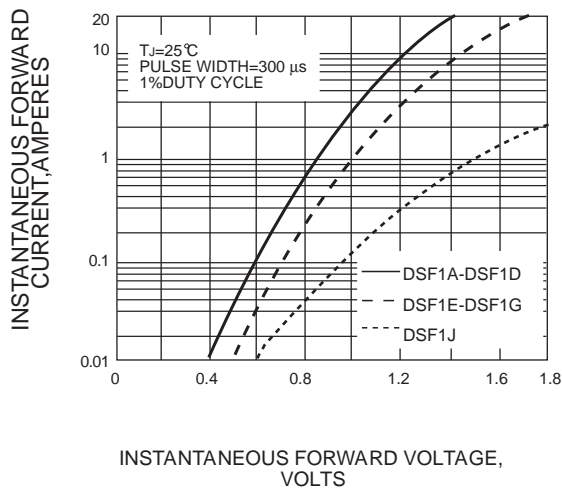


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

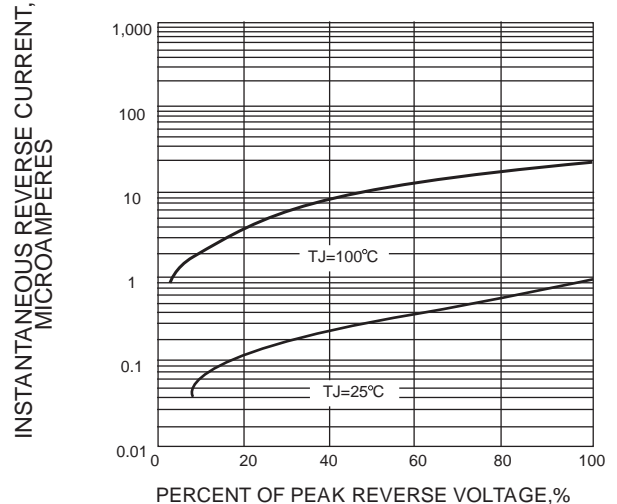


FIG. 5-TYPICAL JUNCTION CAPACITANCE

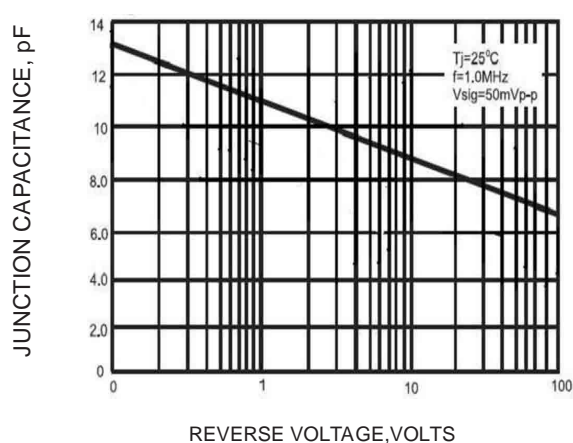


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

